


FORAX-RM RF-over-Fiber Communications System (Rack-Mount Modular System)

FORAX-RM (rack-mount) connects radios to distant antennas. **FORAX-RM** offers a high performance alternative to conventional radio-antenna coaxial cable connections, affording great flexibility in antenna location plus opto-isolation for all the User's radios. Antennas can be located up to 10 km from the radio or >75 km by special order.

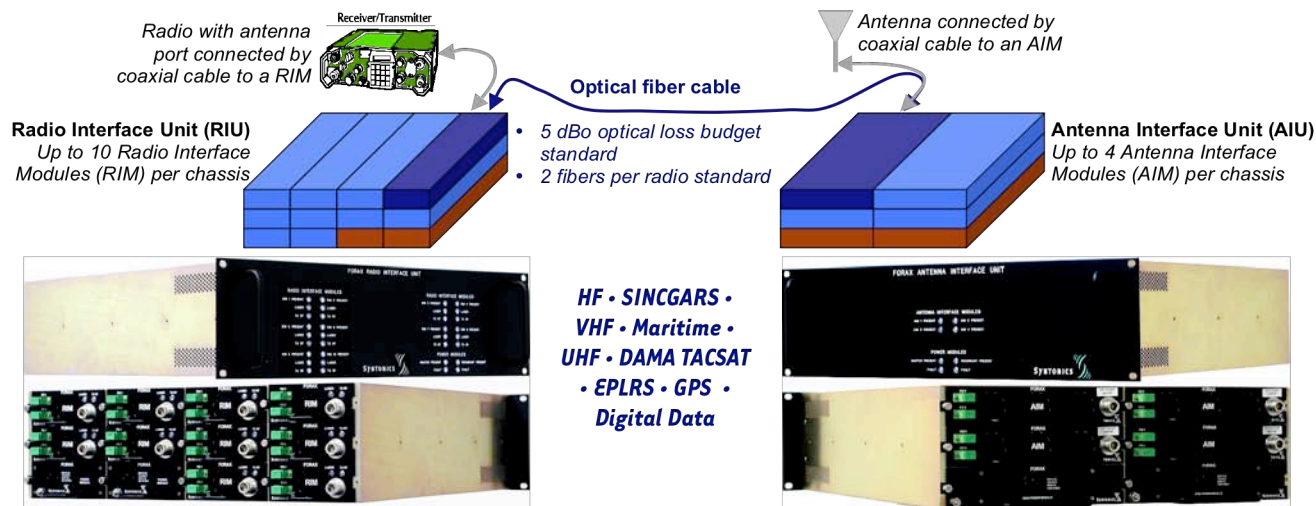

A **FORAX-RM** RF-over-fiber link consists of a radio interface module (RIM) and an Antenna Interface module (AIM). At the radio site, RIMs are mounted in a 19-inch rack-mount chassis and connected by short coaxial cables to each radio's antenna port. At the antenna site, AIMS are mounted in a 19-inch rack-mount chassis and connected to each antenna with coaxial cables. Each chassis is equipped with redundant hot-swappable AC power supplies. Optionally, an AIU can be housed in a weather-tight, lightning-hardened, pole-mount enclosure or a system can be provided in transit cases equipped for outdoor operation.

FORAX-RM functions as a long, loss-free link between the radio and the antenna. System limitations and installation difficulties associated with coaxial cable are overcome by the simplicity and performance of RF-over-fiber connections. **FORAX-RM** provides:

Feature	Benefit
Long Connections	» Radio and its antenna can be located up to 10 km apart using single mode fiber
EMP/EMI Immunity	» Lightning, electromagnetic pulses, or RF interference cannot propagate over, or influence the signals on, optical fiber cables » Radio equipment is opto-isolated from antenna
Easy Routing	» RF signals are carried on lightweight, flexible, rugged, optical cables » Multiple radios can be carried on a single fiber optic cable » Geographic diversity in RF signal routing becomes easy
All frequencies, all modulations	» FORAX-RM modules cover 30-512 MHz » FORAX-RM modules handle all modulations including AM, FM, SINGARS, HAVEQUICK, EPLRS, DAMA TACSAT, GPS (RX only)

FORAX-RM Specifications

RF Link Parameters	RF Performance	
Common frequency bands for factory-installed bandpass filter. <i>OPTION: Auto-tuning filters available some waveforms</i>	HF1-30 MHz Aircraft VHF116-150 MHz Military UHF225-400 MHz EPLRS420-450 MHz (Other frequency bands, waveforms, and TX power levels available from factory)	SINGARS30-88 MHz Maritime VHF & AIS156-162 MHz UHF TACSAT243-318 MHz GPSL1, L2 (receive only)
Link gain	+18 dB (with 30m of fiber)	
Noise figure (NF)	+9 dB	
1-dB compression point	-20 dBm	
Third-order intercept point (IIP3)	-10 dBm (with 30m of fiber)	
Spur-free dynamic range (SFDR)	+103 dBm/Hz (with 30m of fiber)	
Product Characteristics	Radio Interface Modules (RIM)	Antenna Interface Modules (AIM)
RX/TX Switching Time	Supports DAMA TACSAT & EPLRS	
Optical loss budget	< 5 dBo	
Radio TX power into FORAX RIM	2W (AM), 5 W (FM), 20W survive (Other configurations available)	
AIM TX power into antenna (Controllable in 3 dB decrements)		HF modules: 100 mW VHF, UHF: 10W @ 50% duty cycle TACSAT: 2W or 20W @ 50% duty cycle (Other TX power levels available)
User Interface	Link Controls (details vary with waveform): <ul style="list-style-type: none"> ▪ TX power reduction in 3dB steps ▪ Filter band selection Monitor LEDs: <ul style="list-style-type: none"> ▪ Laser operation (end-to-end) ▪ TX RF operation ▪ AIU TX amplifier over-temp ▪ Command link fault 	Monitor LEDs: <ul style="list-style-type: none"> ▪ Power
Packaging <i>OPTION: Transportable, weather-tight enclosures with tactical fiber optic cables for field use in all environments.</i>	Up to 10 RIMs in chassis with two hot-swappable power supplies. <u>Chassis Height* Capacity</u> 1U 2 RIMs 2U 6 RIMs 3U 10 RIMs Chassis depth = 21.5-in *1U = 1.75-in vertical height	Up to 4 AIMs in chassis with two high-power hot-swappable power supplies. <u>Chassis Height Capacity</u> 2U 2 AIMs 3U 4 AIMs 5U 4@2U AIMs Chassis depth = 21.5-in OPTION: AIU housed in weather-tight pole- or panel-mount enclosure.
Installation Notes	User's facility supplies AC power and fiber optic (FO) connection from RIU to AIU. Patch Cable Kits optionally available with coax cable for radio and FO patch cables.	User's facility supplies AC power and fiber optic (FO) connection from RIU to AIU. Patch Cable Kits optionally available with coax cable for radio and FO patch cables.
Fiber optic connector type	SC/APC (other types available)	SC/APC (Other types available)
RF connector type	<ul style="list-style-type: none"> ▪ N-type female (other types available) 	<ul style="list-style-type: none"> ▪ N-type female (other types available)
Power	Universal AC	
Operating temperature	-10 C to +60 C	-10 C to +60 C [Rack-mount] -34C to +60 C [Weather-tight]
Storage temperature	-40 C to +80 C	

Syntonics will be pleased to quote custom configurations, frequencies, power supplies, and other application-specific revisions.